

■ ADVANTAGE

- Wattage switchable :
12w/24W/32W (4FT)
24W/40W/55W (8FT)
- CCT switchable: 3500K/4000K/5000K
- 0-10V dimmable
- Input voltage: AC120-277V
- Lm:1800Lm/3600Lm/4800Lm (4FT)
3600Lm/6000Lm/8250Lm(8FT)
- Efficacy : 150Lm/W
- Application: office,schools,loading ares,library etc



■ DETAILS

Features

- Solid structure and excellent heat dissipation.
- High-density leds for uniform light output.
- Emergency battery & Motion sensor for option, low light decay and longer lifespan.
- Easy to install

Applications

- Schools and universities
- Offices and municipal buildings
- Healthcare facilities and loading ares

Certifications

- DLC 5.1 premium.
- Comply with the requirements of the Standard(s) for luminaires (CAN/CSA-C22.2 No. 250.0) and are identified with the cETL Listed Mark.



Accessories

- Surface mounting kits,Suspension kits.

Warranty

- All products from DIMI LIGHT are guaranteed with 5 years' warranty.
- See [Warranty policy from DIMI LIGHT](#) for additional information.

■ DIMENSIONS

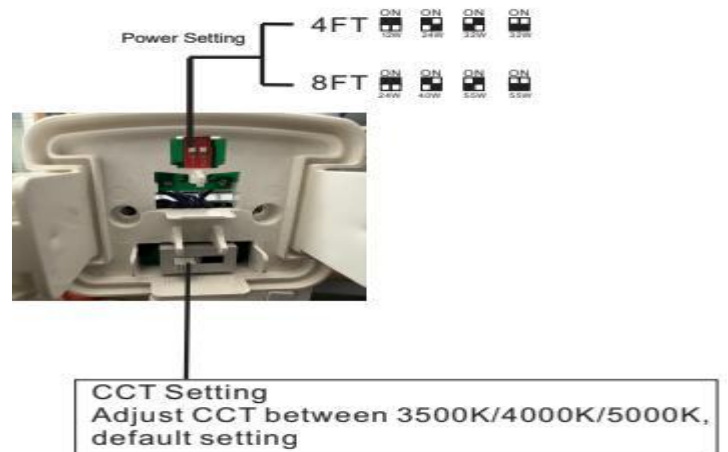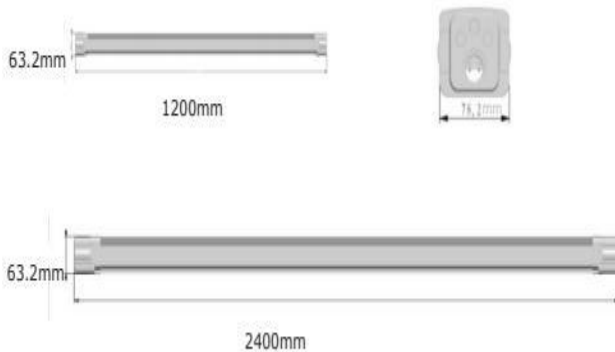

■ SPECIFICATION

	MODEL	SIZE	WATT	CCT	LM	EFFICACY
<input type="checkbox"/>	DM-VP4FT12/24/32W-40/50/60K	4FT	12W/24W/32W switchable	4000K/5000K/6000K switchable	1800LM/3600LM/4800LM	150Lm/w
<input type="checkbox"/>	DM-VP8FT24/40/55W-40/50/60K	8FT	24W/40W/55W switchable	4000K/5000K/6000K switchable	3600LM/6000LM/8250LM	150Lm/w

■ ACCESSORIES

Surface mounting kits

Suspension kits



SURFACE MOUNTING KITS

- Metallic texture
- It can play a good fixed role and protect the interior of the lamp to a certain extent
- Easy installation











SUSPENSION KITS

- Standard accessory
- High quality solid material
- Easy installation

■ PACKING INFO

SIZE	5PCS/CARTON			CONTAINER		
	DIMENSION(INCH)	N.W(LBS)	G.W(LBS)	20'GP(PCS)	40'GP(PCS)	40HQ(PCS)
4ft	48.62"x13.00"x3.15"	36.5	44	550	1062	1337
8ft	24.80"x24.80"x3.15"	56.5	61.25	291	562	707

■ **PACKING INFO**

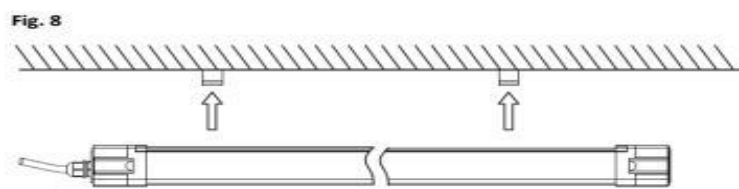

INSTALLATION OPTIONS: (Surface mount)

CAUTION: Turn off electrical power at fuse or circuit breaker box before wiring fixture to the power supply.

Step 1: Open the clips on the end of the fixture.(Fig.1)

Step 2: Pull off the end cap.(Fig.2)

Step 3: Install the waterproof connector to the fixture.(Fig.3)

Step 4: Connect the wires.(Fig.4)

Step 5: Re-attach the end cap to the housing.(Fig.5)

Step 6: Fasten the clips on the fixture.(Fig.6)



Step 7: Install the mounting brackets to the installation surface.(Fig.7)

Step 8: Install the fixture to the mounting brackets.(Fig.8)

PHOTOMETRIC DATA



DM-VP4FT12W-354050K

Watt	12.02W
PF	0.9841
CRI	84
R9	11
Flux	1994 Lm
Efficacy (AC)	143.4 Lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Operating Temperature	30°C to 130°C

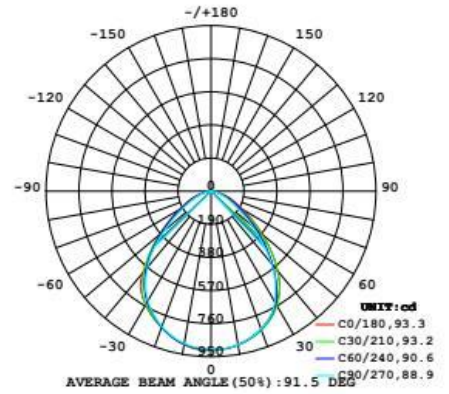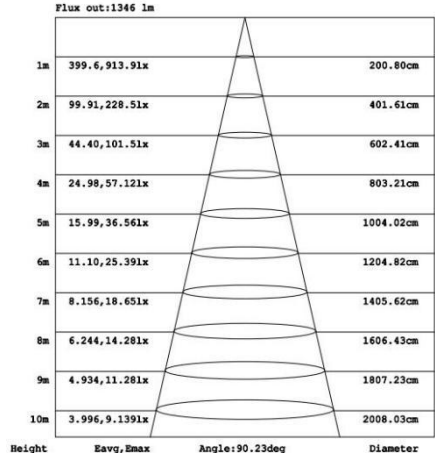



DM-VP4FT24W-354050K

Watt	23.95 W
PF	0.9881
CRI	84
R9	10
Flux	3853.02 Lm
Efficacy (AC)	143.8 Lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Operating Temperature	30°C to 130°C

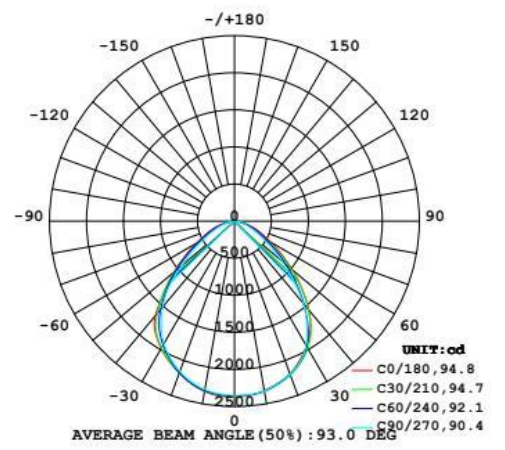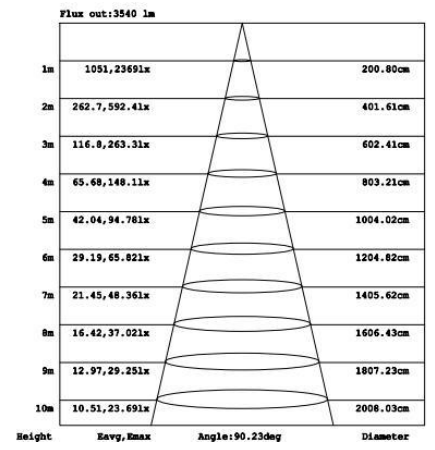

DM-VP4FT32WT-354050K

Watt	32.30W
PF	0.9892
CRI	83
R9	9
Flux	5171.26 Lm
Efficacy (AC)	144.3 Lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Operating Temperature	30°C to 130°C

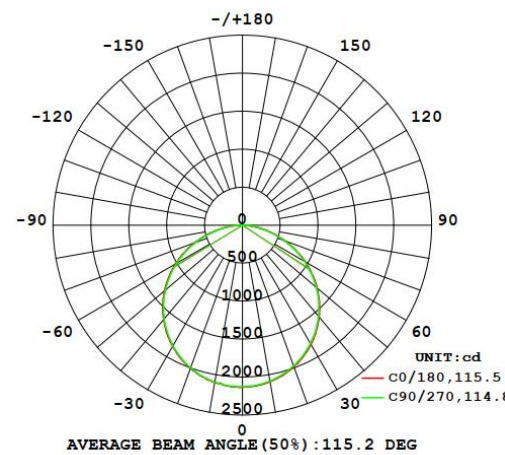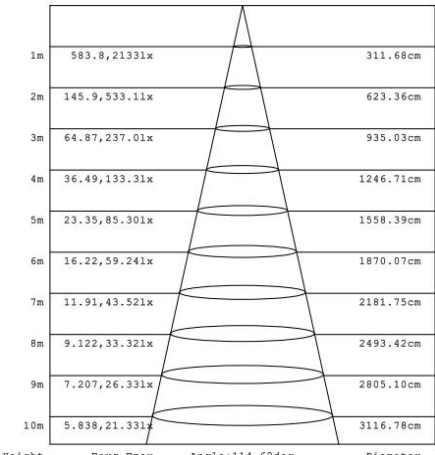

DM-VP8FT55WT-354050K

Watt	55.02W
PF	0.9962
CRI	83
R9	8
Flux	8906.08lm
Efficacy (AC)	144.3 Lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	120-277 V
Operating Temperature	30°C to 130°C

